

Predicting Potential of Pressure Retarded Osmosis Power for Different Estuaries in Turkey

Seda Saki,^a Nigmet Uzal,^b Murat Gökçek,^c and Nuray Ates^d

^aDepartment of Material Science and Mechanical Engineering, Abdullah Gul University, 38380, Kayseri, Turkey

^bDepartment of Civil Engineering, Abdullah Gul University, 38380, Kayseri, Turkey; nigmet.uzal@agu.edu.tr (for correspondence)

^cDepartment of Mechanical Engineering, Nigde University, 51100, Nigde, Turkey; mgokcek@ohu.edu.tr (for correspondence)

^dDepartment of Environmental Engineering, Erciyes University, Kayseri, 38039, Turkey

Published online 00 Month 2018 in Wiley Online Library (wileyonlinelibrary.com). DOI 10.1002/ep.13085

Pressure retarded osmosis (PRO) is an alternative renewable energy source recovered from the salinity gradient between the fresh water (feed solution) and salty water (draw solution). In order to implement osmotic power, the site-specific characteristics including the river and sea salinity, annual flow rates, ecological restrictions were taken into account. This study revealed a comprehensive analysis for a theoretical potential of PRO process for different estuaries in Turkey. In this study, the power potential prediction of PRO process for the Ceyhan, Sakarya, and Meric Rivers were analyzed via Gibbs free energy calculations. The net annual energy production is projected to be 167, 164, and 208 GWh/yr for Ceyhan, Sakarya, and Meric Rivers, respectively. Meric River has the highest energy production of 208 GWh/yr with 186 m³/s mean flow rate and 245 mg/L salinity. These results clearly show that Turkey's rivers having high salinity and flow rate are feasible and applicable for making the osmotic power plant economically. Thereby, it is providing essential direction to the improvement of its design, installation, and operation. The developed methodology for the evaluation of the osmotic power potential of other rivers can be considered as a basis to assess the whole potential on a worldwide level. © 2018 American Institute of Chemical Engineers Environ Prog, 2018

Keywords: Gibbs free energy, pressure retarded osmosis, renewable energy, rivers of Turkey

INTRODUCTION

The largest and important source of greenhouse gas emissions is the combustion of fossil fuels with 25%, of which 21% is of industrial origin. The contribution of fossil fuel combustion and industrial processes to CO₂ emissions has increased by about 90% by 2011 [1]. To reduce the dependence of fossil fuels, new alternative and sustainable energy sources should be explored [2,3]. The chemical potential conversion for power generation has been widely recognized as effective, environmental friendly, and alternative resources of renewable energy [4]. An alternative way for energy storage system is to convert electricity into Gibbs energy using concentration differences of the salty solutions. Sea water including NaCl could be obtained easy, environmental friendly and low cost to use this technology [5]. The most common approaches getting energy from salinity gradient differences are the pressure-retarded osmosis (PRO) [6,7], reverse electrodialysis [8,9], capacitive mixing

[10,11], and hydrogel swelling [12]. PRO process known as a “Blue Energy,” “Salinity Gradient Power” or salinity gradient osmotic energy is a clean and sustainable energy source that can be harnessed from the mixing of two different salt concentrations. A draw solution (DS) in higher concentration is fed at one side whereas a feed solution (FS) in lower concentration is pumped into the other side of the semi-permeable membrane to create an osmotic pressure gradient, which induces fresh water transport through the DS. This approach utilizes the natural process of osmosis, which allows preferential transport of species due to different salinities on either side of a semi-permeable membrane [13]. The pressurized fresh water could run through a hydroturbine converting chemical potential to electric power [6,14,15] (Figure 1). Since the global potential of osmotic power is projected to be huge with negligible chemical demand or CO₂ emissions, PRO becomes an important strategic thrust in solving universe renewable and sustainable energy problem [16].

Osmotic pressure is one of the important factors in power potential of PRO performance and is defined as the pressure that should be applied to the draw solution [17,18]. Experimental studies of benchscale PRO systems with higher osmotic pressure yielded higher power densities compared with similar experiments with lower osmotic pressures. PRO is focused on the salinity gradient difference between seawater and freshwater [19,20]. All around the world, rivers that flows into the sea is mixed naturally with seawater. Therefore, the osmotic power potential can be utilizable source without negative environmental impacts of power plants in nature [21,22]. A number of researchers have come across major real time effects of the installed devices such as seawater corrosion of the metal parts of the devices and on the environment and ecosystem and they have studied major developments in the feasibility of these system for its real case to generate energy from the PRO process in seas and rivers [23–25]. In Turkey, PRO is considered to be a source of renewable energy due to two reasons that: (i) the access to seawater is virtually unlimited, and (ii) fresh water is available throughout the year as rivers discharge water to seas, thus can be performed continuously all year long. As a result, local sites providing higher osmotic pressure difference between the two different salt concentration solutions can potentially generate more electric power [26,27]. Turkey surrounded by the Mediterranean, Aegean, Marmara, and Black Seas, with a total length of 10,765 km. The rivers selected in this study; Ceyhan, Sakarya, and Meric are draining into the eastern Mediterranean, Black, and Aegean

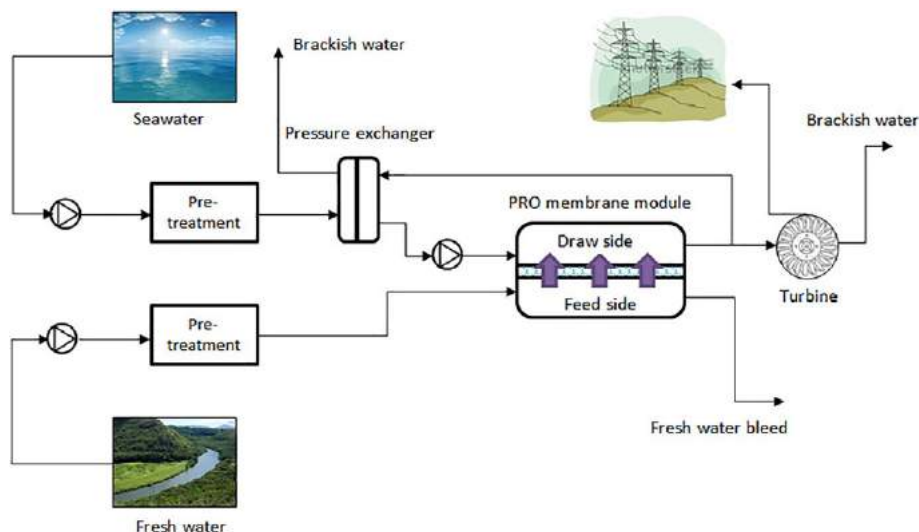


Figure 1. Schematics of PRO power generation. [Color figure can be viewed at wileyonlinelibrary.com]

Seas, respectively. Besides this, the Ceyhan, Sakarya, and Meric Rivers have been identified for their low salinity, ranging from 0.1% to 0.5%. To put this in perspective, the average salinities of Black [28], Mediterranean [29], and Aegean [30] seawaters are between 18‰ and 40‰. The salinity differences of these rivers and seas indicate that Turkey is a possible location for future implementation of PRO in power generation, given the availability of high saline draw solution and fresh water supplies.

In this study, site-specific osmotic power potential with the PRO is investigated by considering three different estuaries in Turkey as a potential location. This study is a preliminary study related to PRO power potential of Turkey and the results from this study can increase understanding of large-scale PRO systems and inform decision making for those interested in future PRO implementations.

METHODOLOGY

Selected Sites and River Data

The Ceyhan, Sakarya, and Meric Rivers have desirable characteristics in terms of salinity and flow rate for potential PRO power plants. The Sakarya River is in the northwest Anatolian region of Turkey and its length is nearly 810 km. The drainage area of the Sakarya River, which is approximately 1/13 of the total area of Turkey, is about 56,000 km² [31]. The Ceyhan is one of the largest rivers flowing to the Mediterranean of Turkey, with an approximately 300 km length [32]. In energy potential evaluations, salinity and flowrate values of Aslantas, the main tributary of Ceyhan River, were used. The Meric is with a length of 480 km, the longest river that flows solely in the interior of the Balkan Peninsula [33]. Selected estuaries to determine salinity gradient energy potential is shown in Figure 2 [34].

In Turkey, flowrate is generally getting higher in the spring season due to snow melt and heavy rainfall. The average monthly flowrates per years for Ceyhan (2003 to 2007), Sakarya (1996 to 2000), and Meric (2003 to 2007) by years are given in Table 1. While the maximum flowrates for Ceyhan, Sakarya, and Meric Rivers are 242 m³/s in March, 254 m³/s April, 362 m³/s in February, on the other hand, the minimum flowrates of rivers are 64 m³/s in December, 62 m³/s in October, and 91 m³/s in July, respectively (Table 1).

Salinity is affected by seawater inputs, groundwater estuarine interflows, atmospheric deposition, diluting effects of stream inputs, surface water inflows from streams of the sea

and precipitation [35]. The monthly salinity values measured in the rivers of Turkey vary greatly. Based on long-term records, the average annual salinity rates are changeable depend on month and climate changes. The monthly salinity values per years for Ceyhan (2003 to 2007), Sakarya (1996 to 2000), and Meric (2003 to 2007) by years were given in Table 1. Although salinity values for Ceyhan, Sakarya, and Meric Rivers decrease in June, May, and March; they increase in January, August, and July, respectively. The annual average salinity for Ceyhan, Sakarya, and Meric Rivers changes between 200–250 mg/L, 300–400 mg/L, and 200–300 mg/L, respectively (Table 1).

Gibbs Free Energy of Mixing

Calculating the available specific energy from the mixing between river and seawater began with the Gibbs free energy of two mixtures with different chemical potential. The energy, which was released in the process, depends on both the specific composition of the solutions and the relative ratio in which the solutions are mixed. Under the conditions of reversible PRO process, the ideal work per unit volume of freshwater is the Gibbs free energy of mixing and a number of assumptions can be made to simplify in Equation 1 [36,37].

$$-\frac{\Delta G_{\text{mix}}}{iRT} = \frac{C_m}{\phi} \ln c_m - c_f \ln c_f - \frac{(1-\phi)}{\phi} c_d \ln c_d \quad (1)$$

where, ΔG_{mix} (kWh/m³) is the mixing energy per unit volume of fresh water. C_m (mol/L or M), C_f (mol/L or M), and C_d (mol/L or M) symbolize the concentrations of the mixture, initial feed and initial draw solutions, respectively. The Van't Hoff factor is given by i is the dissociation constant for the salt, which for NaCl is 2, R (L·kPa/mol·K) is the universal gas constant, and T (K) is the temperature. The ratio of the volume of the initial feed solution to the initial volume for the feed and draw solutions is represented by ϕ . The obtained specific energy of the permeate flow is often be less than the theoretical specific energy due to irreversibility and system inefficiencies [37,38].

Since 1970s, water quality measurements of the rivers in Turkey have been carried out by Turkish General Directorate of State Hydraulic Works (SHW). These measurements include some parameters such as temperature, conductivity, pH, major ions (Ca, Mg, Cl, SO₄, and alkalinity) and other components (boron, sodium absorption ratio, selected heavy metals). Long-term measurements recorded at the downstream of the water

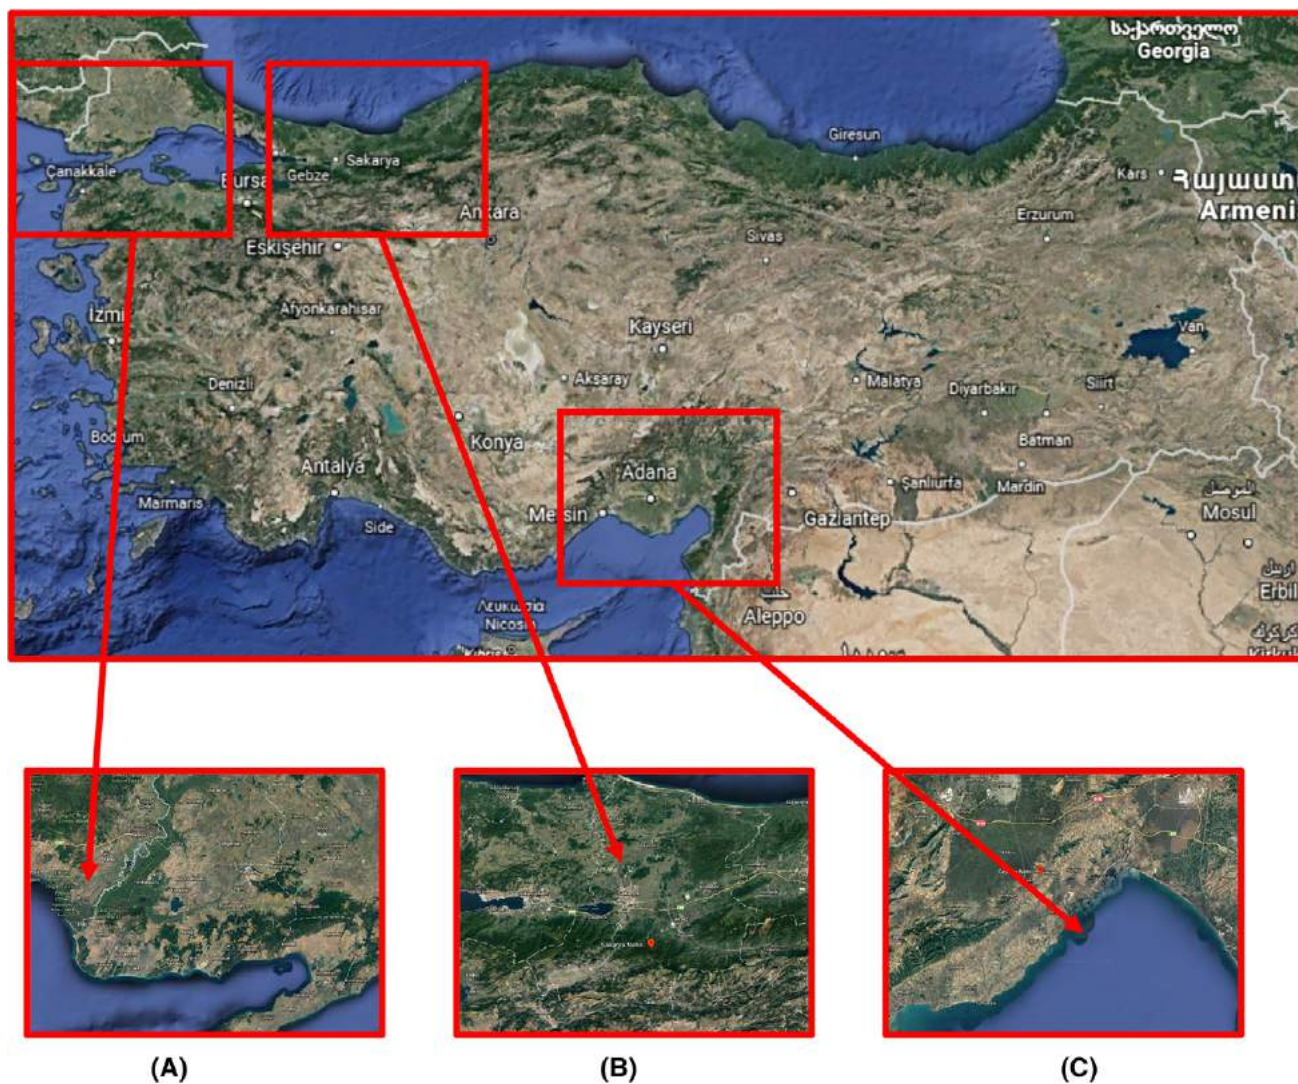


Figure 2. Aerial view of selected estuaries in Turkey: (a) Meric River, (b) Ceyhan River, and (c) Sakarya River [Color figure can be viewed at wileyonlinelibrary.com]

Table 1. Average flowrates and salinities of Ceyhan, Sakarya, and Meric Rivers.

Months	Ceyhan*		Sakarya**		Meric*	
	Flowrate (m ³ /s)	Salinity (mg/L)	Flowrate (m ³ /s)	Salinity (mg/L)	Flowrate (m ³ /s)	Salinity (mg/L)
January	230	246	159	341	227	216
February	157	242	210	361	362	217
March	242	227	242	316	347	213
April	171	245	254	311	176	244
May	116	228	153	300	134	252
June	170	206	94	336	174	218
July	155	210	110	334	91	325
August	173	229	69	416	195	261
September	136	239	95	369	111	278
October	109	238	62	383	113	292
November	78	225	143	342	126	244
December	64	231	158	322	204	185

*2003–2007 mean flowrate and salinity value.

**1996–2000 mean flowrate and salinity value.

quality stations in major river basins show that flow rate and water quality values are highly variable. Regarding osmotic energy and power generation, the required flow rate and salinity of the fresh water through the power plant data were provided by SHW for the Ceyhan (2003–2007), Sakarya (1996–2000), and Meric (2003–2007) rivers (Table 1).

Annual Energy Production

Net producible energy (NPE) for a PRO power plant can be calculated by Equation 2.

$$\text{NPE} = \Delta G_{\text{mix}} \times \text{membrane, hydraulic, and turbine inefficiencies} \quad [\text{kWh/m}^3] \quad (2)$$

In this study, membrane and hydraulic loss was considered as 40% and turbine-generator loss as 15%. Installed power (IP) for a PRO power plant is given by Equation 3.

$$\text{IP} = \text{NPE} \times Q_P \times 3.6 \quad (3)$$

where, Q_P is the flowrate (m^3/s). Annual energy production from a PRO power plant can be calculated from the estimated level of power generation and operation period (in hours) of power plant. Thus, the annual produced energy equation is:

$$E_{\text{production}} = \text{IP} \times \text{CF} \times t \quad (4)$$

where, $E_{\text{production}}$ (MWh) is the annual energy production, W_{net} (MW) is the power capacity of the power plant, CF is the capacity factor, and t is the number of hours in a year.

CO₂ Mitigation from Electricity Generated in the Site

PRO power plants emit no emissions and displace CO₂ and other greenhouse gases that would otherwise be released by conventional fossil-fuelled power plants [39]. A small quantity of CO₂ emissions can be emitted during building and maintained period of PRO power plants. It is possible to calculate the avoidance of CO₂ through fossil fuel displacement as following equation (Equation 5) [40]

$$\text{CO}_{2\text{avoidance}} = E_{\text{production}} \times \text{EF}_{\text{elec}} \times 1000 \quad [\text{kgCO}_2] \quad (5)$$

where, AEP is the annual electricity generation (kWh), EF_{elec} is the emission factor, and in the present study, it was expected to be 0.86 kg CO₂/kWh [41].

RESULTS

In PRO, the highest power density is obtained where the salinity is high for the feed and draw solutions. At high dilutions of the draw, the free energy of mixing per cubic meter draw increases sharply. For the site specific and technical potentials average river discharge flowrates can be actually used for calculations of energy generation. Yip and Elimelech (2012) reported the maximum extractable work in PRO process was less than the free energy of mixing [37]. In practical operations, when the process is operated in constant pressure mode, it is not allowed to run to equilibrium and as a result there was a loss of energy [38].

There is no entropy generation in a reversible thermodynamics process [42]. Figure 3 shows Gibbs free energy of mixing and salinity of Ceyhan, Sakarya, and Meric Rivers with respect to months. The highest mixing energies of Ceyhan, Sakarya, and Meric Rivers were: 0.596 kWh/m³ in June, 0.361 kWh/m³ in May, and 0.548 kWh/m³ in March, respectively, when ϕ is 0.5 and temperature T is 298 K. For the same conditions, the lowest mixing energies of Ceyhan, Sakarya, and Meric Rivers were: 0.591 kWh/m³ in January, 0.351 kWh/m³ in August, and 0.537 kWh/m³ in July, respectively. PRO with seawater with 0.6 M

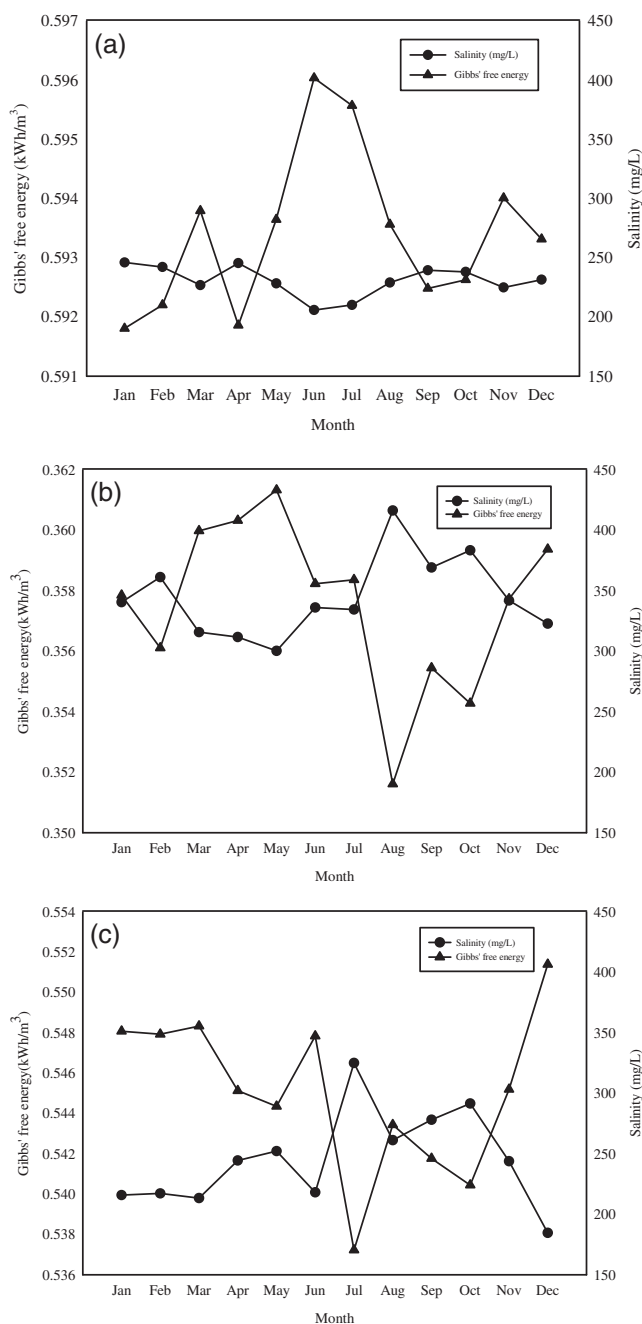


Figure 3. Gibbs free energy of mixing and average salinity of: (a) Ceyhan River, (b) Sakarya River, and (c) Meric River

concentration as draw solution and river water 0.015 M as feed solution, the theoretical maximum specific energy is 0.192 kWh/m³ [38]. Another potential combination of Dead Sea water (5.7 M NaCl) as draw solution and brine as feed solution yielded a maximum ideal specific energy of about 1.0 kWh/m³ using counter-current PRO [43]. For a PRO power plant operated at an actual efficiency of 60% with a river water feed solution and a seawater draw solution and the specific extractable work was 0.46 kWh/m³. Assuming a further 20% lost from inefficiencies in PRO system components, 0.37 kWh of useful work can be derived per cubic meter of the river water feed solution [37]. In PRO process, the draw solution salinity affects both the osmotic pressure and the applied pressure. Therefore, the important point is to decide whether the salinity of the selected site is suitable for feasible PRO power generation systems [44]. The

salinity of Mediterranean, Black, and Aegean Seas used in this study are 653, 413, and 603 mM, respectively. Compared with the feed and draw solution salinity, the effect of the draw salinity on the total free energy is larger which led to increasing extractable energy. Although river salinity values are similar for all rivers, Black Sea salinity is the lowest among them. As a result, Gibbs free energy value is affected because of this high salinity ratio.

Because of membrane, turbine inefficiencies, pre-treatment requirements for both feed and draw solutions, the net power per m^3 mixing solution was less than its theoretical value [27,44,45]. Figure 4 shows the installed power potential of Ceyhan, Sakarya, and Meric Rivers calculated based on monthly average flowrates when membrane and hydraulic efficiencies are 40% and the energy consumption in ultrafiltration process as pre-treatment was 0.15 kWh/m^3 . The solution pre-treatment is an important subsystem in this PRO power plant due to impurities from the incoming solutions. The primary metric to determine the quality of the solutions is water turbidity, which is designed to measure the relative clarity of water [46,47]. Membrane fouling happened when impurities from the feed and draw solutions are accumulated on the membrane and; as a result, the overall efficiency of the PRO power plant was reduced [48]. The water quality of Turkish Rivers shows a wide variability, being influenced by both natural and anthropogenic factors. Rivers that are mostly disposed to natural pollution is caused mainly by domestic (sewage) and industrial waste waters, and from irrigation return waters in Turkey. The effects of untreated domestic wastewaters on rivers decrease through downstream because of the natural biodegradation of chemicals and also dilution from tributaries. Pre-treatment of solutions is essential to ensure high quality of solutions going through the membrane module and ultimately minimizes membrane fouling [49]. The installed power potentials of Ceyhan, Sakarya, and Meric Rivers for PRO power generation depending on river flowrates are between 37 and 179 MW, 52 and 187 MW, 106 and 518 MW, respectively.

The PRO power potential considers the efficiencies in the energy conversion process and that the average river flow can be used for energy generation. However, technical and environmental constraints have to be considered in order to scale-up from the site specific potential to the exploitable potential. Most rivers exhibit temporal variability of the natural flow that is an important constraint for PRO power plants design [50]. On the other hand, for a PRO power plant project, it is important that a minimum flow in the riverbed should remain after the intake of a power plant in order to endure the protection of fauna and the ecosystem [51]. Turkey connects two continents and, consequently, acts as a major migration and mixing corridor with a gorgeous biodiversity, including a high number of endemic species. In particular, southern and southeastern Anatolia contains several local biodiversity hotspots within the large Mediterranean global hotspot area. In this study, for the calculation of the ecological potential of the prospective PRO power plant in Ceyhan, Sakarya, and Meric Rivers, 25% of the lowest values of the multiannual monthly flow series was used as ecological flow. Ortega *et al.* (2014) used an extraction factor of 20% and an ecological flow of 12% of the mean discharge that for the Leon River [14]. Installed power potential of Ceyhan, Sakarya, and Meric Rivers for ecological flow conditions are shown in Figure 5. The installed power potentials of Ceyhan, Sakarya, and Meric Rivers for PRO power generation with respect to river flowrates considering ecological criteria are between 28–170 MW, 32–174 MW, and 172–669 MW, respectively.

For the design of PRO power plants, average annual flow rate value of a river was taken and a flow equal to 20% of the average flow is proposed as a reference value for the design flow. These values were: 149, 146, and $186 \text{ m}^3/\text{s}$ for Ceyhan, Sakarya, and Meric Rivers, respectively. A power factor for PRO power plants was varied between 0.6 and $0.85 \text{ MW}/(\text{m}^3/\text{s})$

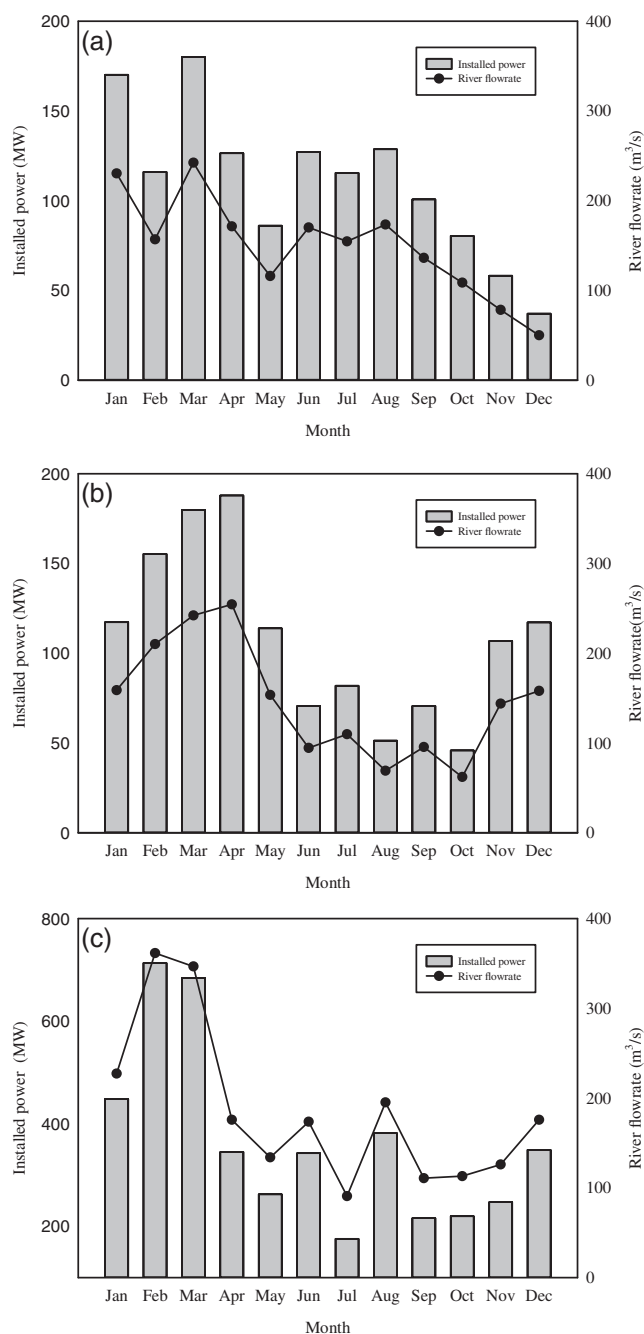


Figure 4. Installed power potential of: (a) Ceyhan River, (b) Sakarya River, and (c) Meric River

s). A power factor of $0.8 \text{ MW}/(\text{m}^3/\text{s})$ was used for the calculation in this study. Prospective osmotic power plant parameters for Ceyhan, Sakarya, and Meric Rivers are shown in Table 2. While the average salinity of the Great Salt Lake was taken as 24% (or 240 g/L) and fresh solution salt concentration was considered to be 0.05% (or 0.5 g/L). Although the theoretical maximum osmotic energy from the Gibbs free energy of mixing of the two solutions is 5.54 kWh/m^3 , the net annual energy production is 154 MWh with all the energy losses and consumption taken into account because of lower flowrates of the freshwater ($1.54 \text{ m}^3/\text{s}$) and the saltwater ($3.08 \text{ m}^3/\text{s}$) [52]. The proposed configuration for Lake Torrens in Australia could generate up to 2.6 GW for a $225 \text{ m}^3/\text{s}$ seawater flow rate [19]. The theoretical power of the Great Salt Lake was around 162 GWh (5.7% of total net electricity generation) [52]. The

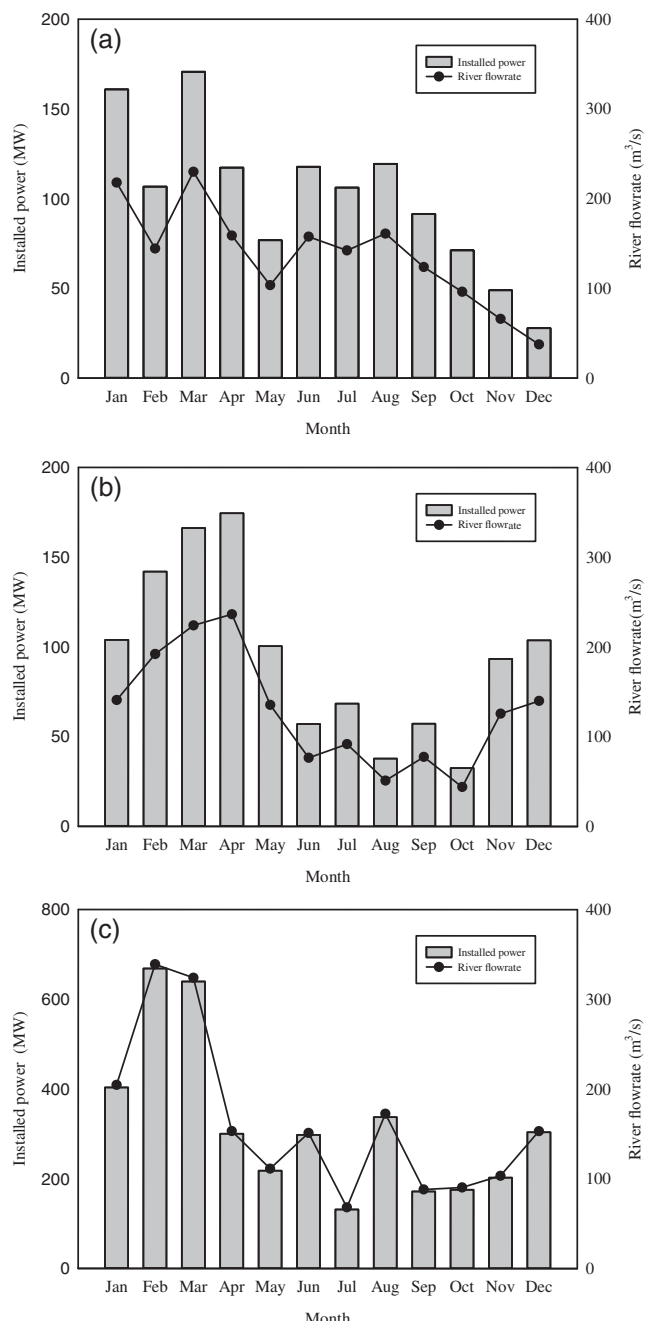


Figure 5. Installed power potential of (a) Ceyhan, (b) Sakarya, and (c) Meric for ecological flow conditions

Merich River has a high osmotic energy potential (208 GWh/yr), making it one of the most important rivers in Northeastern of Turkey. For Merich River osmotic plant, annual avoidance of CO₂ emission was calculated as 1.79E + 08.

CONCLUSIONS

In this study, the potential of the salinity gradient of Ceyhan, Sakarya, and Merich Rivers (Turkey) were evaluated. The theoretical maximum osmotic energy from the Gibbs free energy of mixing of the two solutions were: 0.591, 0.361, and 0.537 kWh/m³, respectively if the volume ratio approaches zero when ϕ is 0.5 and temperature $T = 298$ K. Depending on design flow, power factor, and installed capacity and annual electricity energy generation was calculated as 167, 164, and 208 GWh/yr for Ceyhan, Sakarya, and Merich Rivers,

Table 2. Osmotic power plant parameters at Ceyhan, Sakarya, and Merich River

Category	Ceyhan	Sakarya	Merich
Mean flow [m ³ /s]	149	146	186
Design flow [m ³ /s]	30	29	37
Ecological flow [m ³ /s]	12	18	23
Power factor [MW/(m ³ /s)]	0.8	0.8	0.8
Capacity factor [–]	0.8	0.8	0.8
Installed capacity [MW]	24	23	30
Electricity generation [GWh/yr]	167	164	208
CO ₂ avoidance [kg CO ₂ /yr]	1.44E + 08	1.41E + 08	1.79E + 08

respectively. As the Government of Turkey has been funding research on new sources of renewable energy as a result of targets to reduce greenhouse gas emissions and to increase the supply of energy by renewable sources, the results of this study supporting that PRO power plant is technically reasonable for these regions. System design integration and cost analysis for a potential PRO power plant at the Turkey's Rivers can identify key aspects for building a successful PRO system. Also PRO is advantageous in terms of its ability to generate a constant and reliable supply of power as compared with other renewable sources, osmotic power with PRO can become an attractive alternative in the power generation mix. Another issue will probably be the attraction of investors to this new technology, given that PRO systems involve serious technical uncertainties such as, the lifetime of the membranes and the ongoing maintenance costs. Therefore, more research is required, for the progressive improvement of PRO systems to full scale commercial units.

ACKNOWLEDGMENTS

The authors are grateful to the Scientific and Technological Research Council of Turkey (project no: 115Y617) for providing financial support as a research project.

LITERATURE CITED

- IPCC. (2014) Climate change 2014: Mitigation of climate change.
- Demirbas, A. (2005). Potential applications of renewable energy sources, biomass combustion problems in boiler power systems and combustion related environmental issues, Progress in Energy and Combustion Science, 31, 171–192.
- Su, T., Shao, Q., Qin, Z., Guo, Z., & Wu, Z. (2018). Role of interfaces in two-dimensional photocatalyst for water splitting, ACS Catalysis, 8, 2253–2276.
- Islam, M.S., Sultana, S., Adhikary, S., & Rahaman, M.S. (2018). Highly effective organic draw solutions for renewable power generation by closed-loop pressure retarded osmosis, Energy Conversion and Management, 171, 1226–1236.
- Long, R., Lai, X., Liu, Z., & Liu, W. (2018). A continuous concentration gradient flow electrical energy storage system based on reverse osmosis and pressure retarded osmosis, Energy, 152, 896–905.
- Thorsen, T., & Holt, T. (2009). The potential for power production from salinity gradients by pressure retarded osmosis, Journal of Membrane Science, 335, 103–110.
- Klaysom, C., Cath, T.Y., Depuydt, T., & Vankelecom, I.F. (2013). Forward and pressure retarded osmosis: Potential solutions for global challenges in energy and water supply, Chemical Society Reviews, 42, 6959–6989.
- Vermaas, D.A., Veerman, J., Yip, N.Y., Elimelech, M., Saakes, M., & Nijmeijer, K. (2013). High efficiency in energy generation from salinity gradients with reverse

- electrodialysis, *ACS Sustainable Chemistry & Engineering*, 1, 1295–1302.
9. Post, J.W., Hamelers, H.V.M., & Buisman, C.J.N. (2008). Energy recovery from controlled mixing salt and fresh water with a reverse electrodialysis system, *Environmental Science & Technology*, 42, 5785–5790.
10. Hatzell, M.C., Cusick, R.D., & Logan, B.E. (2014). Capacitive mixing power production from salinity gradient energy enhanced through exoelectrogen-generated ionic currents, *Energy & Environmental Science*, 7, 1159–1165.
11. La Mantia, F., Pasta, M., Deshazer, H.D., Logan, B.E., & Cui, Y. (2011). Batteries for efficient energy extraction from a water salinity difference, *Nano Letters*, 11, 1810–1813.
12. Zhu, X., Yang, W., Hatzell, M.C., & Logan, B.E. (2014). Energy recovery from solutions with different salinities based on swelling and shrinking of hydrogels, *Environmental Science & Technology*, 48, 7157–7163.
13. Sharma, M., Mondal, P., Chakraborty, A., Kuttippurath, J., & Purkait, M. (2018). Effect of different molecular weight polyethylene glycol on flat sheet cellulose acetate membranes for evaluating power density performance in pressure retarded osmosis study, *Journal of Water Process Engineering*. <https://doi.org/10.1016/j.jwpe.2018.05.011>.
14. Ortega, S., Stenzel, P., Alvarez-Silva, O., & Osorio, A.F. (2014). Site-specific potential analysis for pressure retarded osmosis (PRO) power plants – The León River example, *Renewable Energy*, 68, 466–474.
15. Logan, B.E., & Elimelech, M. (2012). Membrane-based processes for sustainable power generation using water, *Nature*, 488, 313–319.
16. Han, G., Liu, J.T., Lu, K., & Chung, T.-S. (2018). advanced anti-fouling membranes for osmotic power generation from wastewater via pressure retarded osmosis (PRO), *Environmental Science & Technology*, 52, 6686–6694.
17. Post, J.W., Veerman, J., Hamelers, H.V., Euverink, G.J., Metz, S.J., Nymeijer, K., & Buisman, C.J. (2007). Salinity-gradient power: Evaluation of pressure-retarded osmosis and reverse electrodialysis, *Journal of Membrane Science*, 288, 218–230.
18. Yip, N.Y., Tiraferri, A., Phillip, W.A., Schiffman, J.D., Hoover, L.A., Kim, Y.C., & Elimelech, M. (2011). Thin-film composite pressure retarded osmosis membranes for sustainable power generation from salinity gradients, *Environmental Science & Technology*, 45, 4360–4369.
19. Anissimov, Y., Helfer, F., Lemckert, C., & Sahin, O. (2013). Salinity gradient energy: A new source of renewable energy in Australia, *Water Utility Journal*, 5, 3–13.
20. Yip, N.Y., & Elimelech, M. (2011). Performance limiting effects in power generation from salinity gradients by pressure retarded osmosis, *Environmental Science & Technology*, 45, 10273–10282.
21. Helfer, F., Lemckert, C., & Anissimov, Y.G. (2014). Osmotic power with pressure retarded osmosis: Theory, performance and trends—a review, *Journal of Membrane Science*, 453, 337–358.
22. Chou, S., Wang, R., Shi, L., She, Q., Tang, C., & Fane, A.G. (2012). Thin-film composite hollow fiber membranes for pressure retarded osmosis (PRO) process with high power density, *Journal of Membrane Science*, 389, 25–33.
23. Mahato, N., Ansari, M.O., & Cho, M.H. (2015). Production of utilizable energy from renewable resources: Mechanism, machinery and effect on environment. In Y. Yin & X. Wang (Eds.), *Advanced materials research*. (pp. 1–32), Stafa-Zurich: Trans Tech Publ.
24. Kang, H., Cheng, Z., Lai, H., Ma, H., Liu, Y., Mai, X., Wang, Y., Shao, Q., Xiang, L., Guo, X., & Guo, Z. (2018). Superlyophobic anti-corrosive and self-cleaning titania robust mesh membrane with enhanced oil/water separation, *Separation and Purification Technology*, 201, 193–204.
25. Zhang, Y., Zhao, M., Zhang, J., Shao, Q., Li, J., Li, H., Lin, B., Yu, M., Chen, S., & Guo, Z. (2018). Excellent corrosion protection performance of epoxy composite coatings filled with silane functionalized silicon nitride, *Journal of Polymer Research*, 25, 130.
26. Balat, M. (2004). the use of renewable energy sources for energy in Turkey and potential trends, *Energy Exploration & Exploitation*, 22, 241–257.
27. Skilhagen, S.E., Dugstad, J.E., & Aaberg, R.J. (2008). Osmotic power — power production based on the osmotic pressure difference between waters with varying salt gradients, *Desalination*, 220, 476–482.
28. Kokkos, N., & Sylaios, G. (2016). Modeling the buoyancy-driven black sea water outflow into the north aegean sea, *Oceanologia*, 58, 103–116.
29. Cordero, S.G. (1999). The use of thermal satellite data in dense water formation studies in the Mediterranean Sea, *Journal of Marine Systems*, 20, 175–186.
30. Poulos, S.E., Drakopoulos, P.G., & Collins, M.B. (1997). Seasonal variability in sea surface oceanographic conditions in the Aegean Sea (Eastern Mediterranean): An overview, *Journal of Marine Systems*, 13, 225–244.
31. S. Isik, M. Sasal, E. Dogan, Investigation on changes of the sakarya river characteristics. In *World Environmental and Water Resource Congress 2006: Examining the Confluence of Environmental and Water Concerns*, 2006, pp. 1–8.
32. Tannverdi, Ç., Alp, A., Demirkiran, A.R., & Üçkardeş, F. (2010). Assessment of surface water quality of the Ceyhan River basin, Turkey, *Environmental Monitoring and Assessment*, 167, 175–184.
33. Tokatli, C. (2015). Assessment of Water Quality in the Meriç River as an Ecosystem Element in Turkey's Thrace Region, *Polish Journal of Environmental Studies*, 24, 2205–2211.
34. Google Corporation. (2018). Google Earth Release 9.2.70.1.01/06/2018, from <https://earth.google.com/web/@39.08764595,35.17777245,1254.99579617a,2309622.03513919d,35y,0h,0t,0r>.
35. Sumner, D., & Belaineh, G. (2005). Evaporation, precipitation, and associated salinity changes at a humid, subtropical estuary, *Estuaries and Coasts*, 28, 844–855.
36. O'Toole, G., Jones, L., Coutinho, C., Hayes, C., Napoles, M., & Achilli, A. (2016). River-to-sea pressure retarded osmosis: Resource utilization in a full-scale facility, *Desalination*, 389, 39–51.
37. Yip, N.Y., & Elimelech, M. (2012). Thermodynamic and energy efficiency analysis of power generation from natural salinity gradients by pressure retarded osmosis, *Environmental Science & Technology*, 46, 5230–5239.
38. Lin, S., Straub, A.P., & Elimelech, M. (2014). Thermodynamic limits of extractable energy by pressure retarded osmosis, *Energy & Environmental Science*, 7, 2706–2714.
39. Pan, F., Xiang, X., & Li, Y. (2018). Nitrogen coordinated single atomic metals supported on nanocarbons: A new frontier in electrocatalytic CO₂ reduction, *Engineered Science*, 1, 21–32.
40. Chen, Y.-C., & Lo, S.-L. (2016). Evaluation of greenhouse gas emissions for several municipal solid waste management strategies, *Journal of Cleaner Production*, 113, 606–612.
41. GDEA. Monthly energy statistics report, in, 2016.
42. Tal, A. (2006). Seeking sustainability: Israel's evolving water management strategy, *Science*, 313, 1081–1084.
43. Straub, A.P., Deshmukh, A., & Elimelech, M. (2016). Pressure-retarded osmosis for power generation from salinity gradients: Is it viable? *Energy & Environmental Science*, 9, 31–48.

-
44. Sarp, S., Li, Z., & Saththasivam, J. (2016). Pressure Retarded Osmosis (PRO): Past experiences, current developments, and future prospects, *Desalination*, 389, 2–14.
 45. Loeb, S. (2002). Large-scale power production by pressure-retarded osmosis, using river water and sea water passing through spiral modules, *Desalination*, 143, 115–122.
 46. Isaías, N.P. (2001). Experience in reverse osmosis pretreatment, *Desalination*, 139, 57–64.
 47. Shahalam, A.M., Al-Harthy, A., & Al-Zawhry, A. (2002). Feed water pretreatment in RO systems: Unit processes in the middle east, *Desalination*, 150, 235–245.
 48. Gao, W., Liang, H., Ma, J., Han, M., Chen, Z.-l., Han, Z.-s., & Li, G.-b. (2011). Membrane fouling control in ultrafiltration technology for drinking water production: A review, *Desalination*, 272, 1–8.
 49. Wang, Z., Hou, D., & Lin, S. (2016). Gross vs. net energy: Towards a rational framework for assessing the practical viability of pressure retarded osmosis, *Journal of Membrane Science*, 503, 132–147.
 50. Alvarez-Silva, O., Osorio, A., & Winter, C. (2016). Practical global salinity gradient energy potential, *Renewable and Sustainable Energy Reviews*, 60, 1387–1395.
 51. Poff, N.L., & Zimmerman, J.K. (2010). Ecological responses to altered flow regimes: A literature review to inform the science and management of environmental flows, *Freshwater Biology*, 55, 194–205.
 52. Tran, T.T.D., Park, K., & Smith, A.D. (2017). System scaling approach and thermoeconomic analysis of a pressure retarded osmosis system for power production with hypersaline draw solution: A Great Salt Lake case study, *Energy*, 126, 97–111.
-